

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

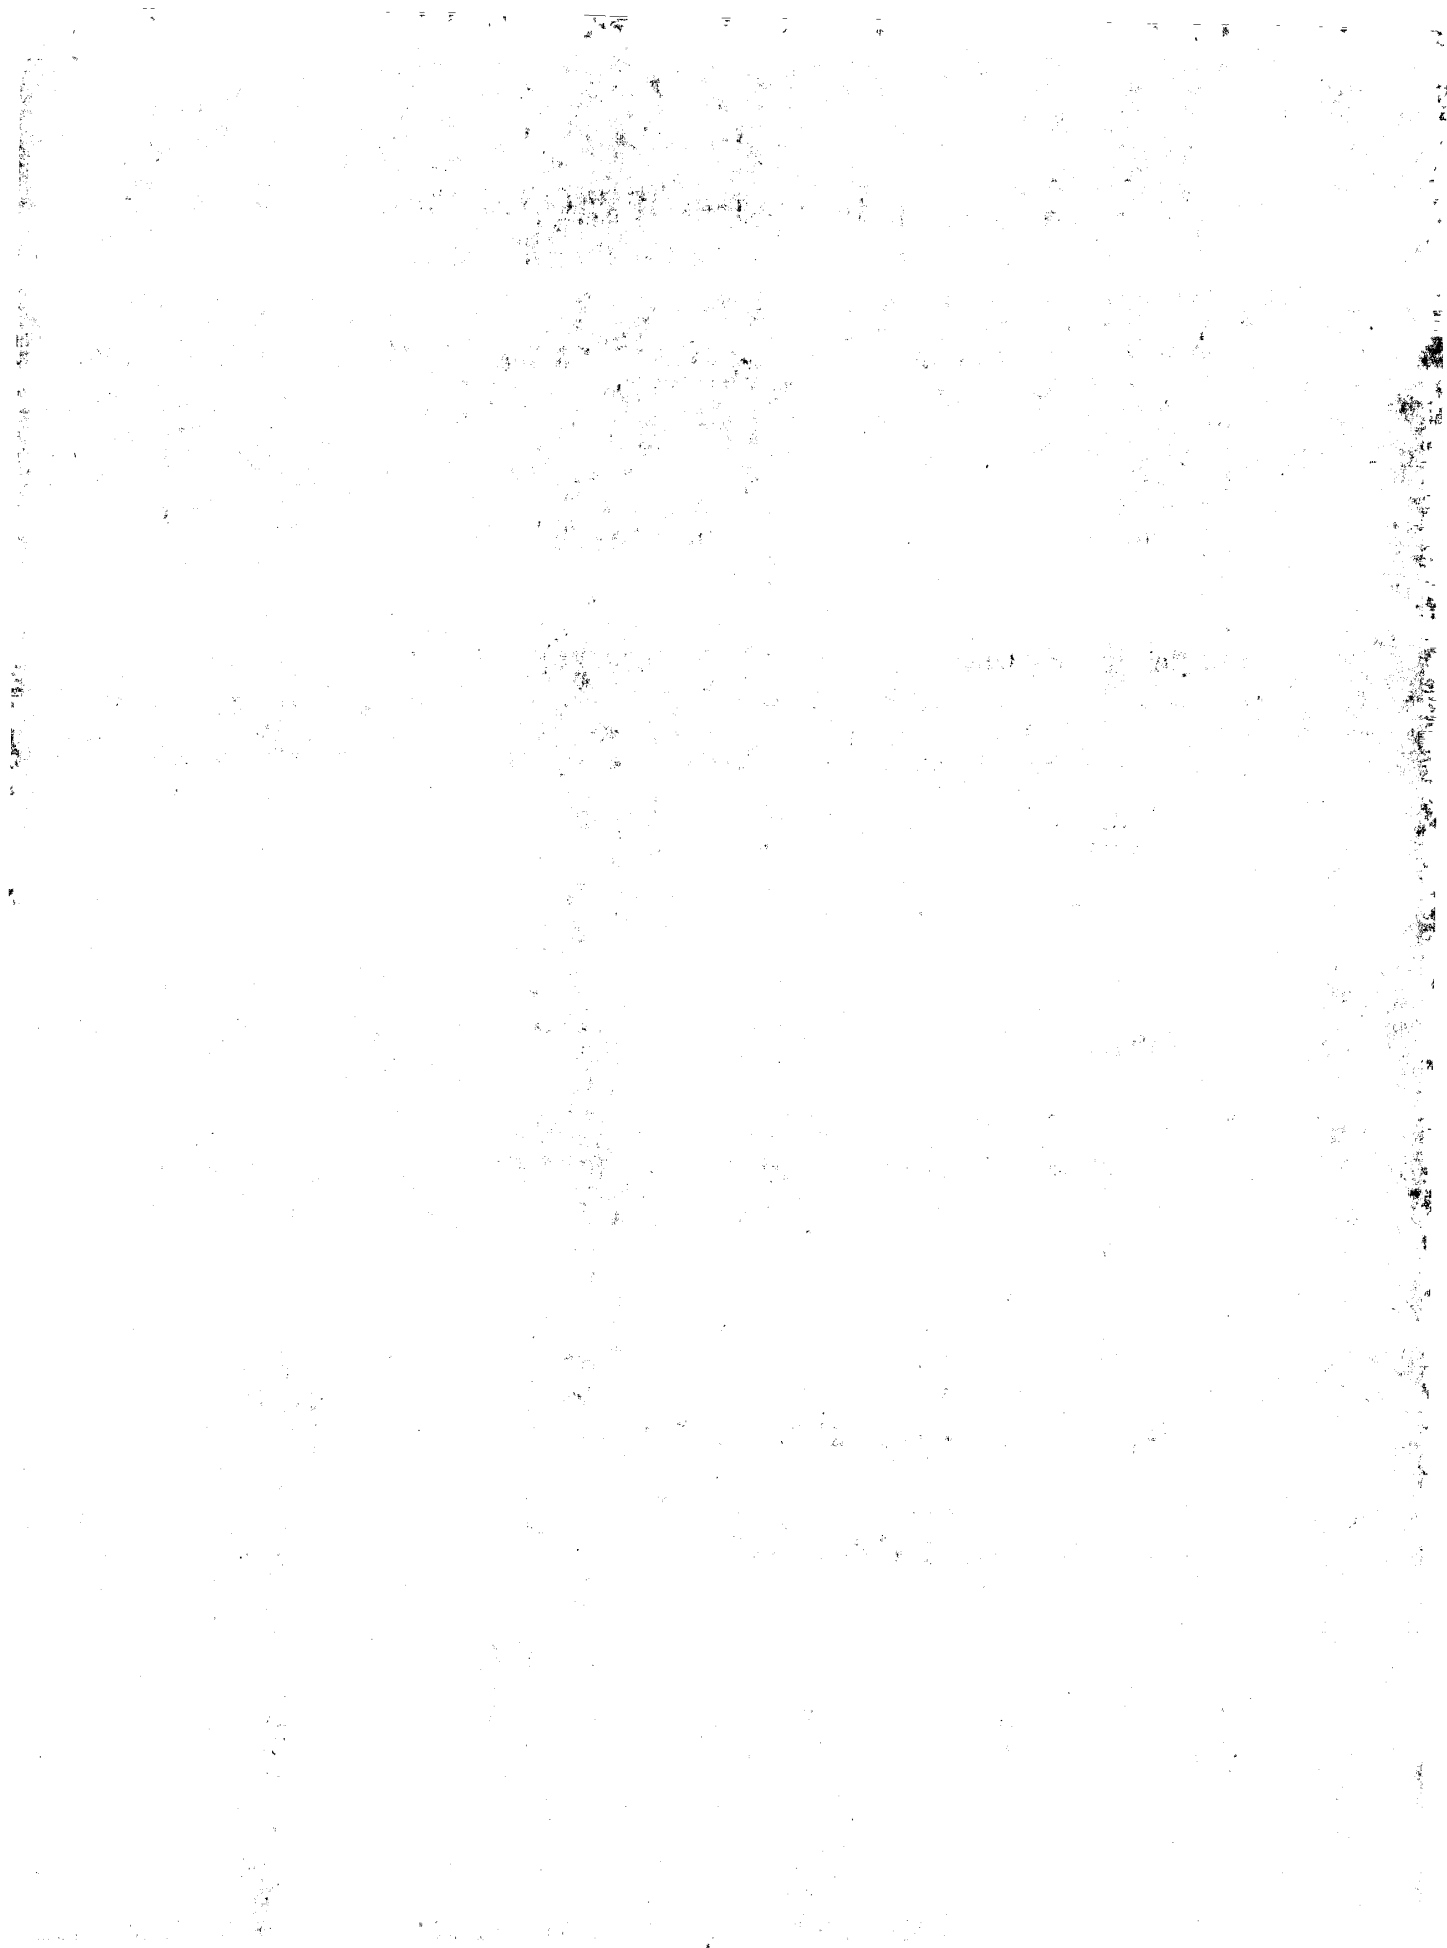

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 324 475
A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89100483.0

(51) Int. Cl.⁴: C07C 43/04 , C07C 41/01

(22) Date of filing: 12.01.89

(30) Priority: 14.01.88 US 143799

(43) Date of publication of application:
19.07.89 Bulletin 89/29(84) Designated Contracting States:
BE DE ES FR GB IT NL

(71) Applicant: **AIR PRODUCTS AND CHEMICALS, INC.**
Allentown Route 222
Trexlerstown, PA 18087(US)

(72) Inventor: **Hsiung, Thomas Hsiao-Ling**
4727 Glenwood Circle
Emmaus, PA 18049(US)
Inventor: **White, James Ferguson**
4970 Briarwood Drive
Macungie, PA 18062(US)
Inventor: **Lewnard, John Joseph**
R.D. No.1, Box 41
Emmaus, PA 18049(US)

(74) Representative: **Sandmair, Kurt, Dr.**
Patentanwälte Schwabe, Sandmair, Marx
Stuntzstrasse 16
D-8000 München 80(DE)

(54) One-step process for dimethyl ether synthesis utilizing a liquid phase reactor system.

(57) A one-step process is disclosed for the production of dimethyl ether, with varying amounts of co-product methanol, from synthesis gas. In the process, synthesis gas with a wide range of compositions of H₂, CO, CO₂, and other species is contacted with a catalyst or mixture of catalysts suspended in an inert liquid in a three phase reactor system. In situations where the feed gas is relatively rich in CO and poor in H₂, H₂O may be co-fed to enhance productivity. The catalyst, which comprises both a methanol synthesis component and a dehydration (ether forming) component, can be in the form of pellets or powder, depending on the mode of operation for the reactor.

EP 0 324 475 A1


ONE-STEP PROCESS FOR DIMETHYL ETHER SYNTHESIS UTILIZING A LIQUID PHASE REACTOR SYSTEM

TECHNICAL FIELD


The present invention relates to a process for the production of dimethyl ether. More specifically, the present invention relates to a process for the direct production of dimethyl ether from synthesis gas using a three-phase reactor system.

BACKGROUND OF THE INVENTION


Conversion of synthesis gas to dimethyl ether requires three steps. Conventionally, synthesis gas is produced by reforming hydrocarbon or gasifying a carbon source such as coal or coke. Since this later synthesis gas usually is too rich in CO to be used directly for dimethyl ether synthesis, an intermediate step is needed for conventional dimethyl ether manufacture. Consequently, the first step in the dimethyl ether synthesis is to adjust the composition of the synthesis gas via the water-gas shift reaction:



After the ratio of hydrogen to carbon oxides has been adjusted, the gas is reacted to produce methanol (MeOH):



Finally, methanol is dehydrated to form dimethyl ether (DME):



The shift and methanol synthesis reactions are equilibrium limited and exothermic. Moreover, the catalysts for both reactions are subject to severe deactivation when overheated. To avoid thermodynamic limitations and excessive catalyst deactivation, conventional gas phase reactors must be run at low per-pass conversions to maintain reactor temperature. Consequently, overall conversion of carbon monoxide to dimethyl ether is limited.

Multi-step processes, which use separate reactors for each reaction, can not exploit the potential synergism of the three reactions. If these three reactions could be conducted simultaneously, methanol synthesis would drive the forward shift reaction, and dimethyl ether synthesis would drive both the methanol and shift reaction. Consequently, a one-step process is more flexible and can operate under a wider range of conditions than a multi-step process. In addition, multi-step processes require separate reactors, heat exchangers, and associated equipment for each reaction.

A single-step gas phase process would generally require less equipment than multi-step gas processes. However, a single-step gas-phase process would still suffer from a large reactor exotherm due to the high net heat of reaction. Hence, low per-pass conversions would be required to maintain reactor temperature to avoid a short catalyst life due to the large temperature rises associated with these reactions. Since the reactor is not isothermal, there are often severe equilibrium limitations on per pass reactant conversions.

Much of the prior art for dimethyl ether synthesis focuses on processes using improved catalysts to run shifted syngas (H_2/CO greater than or equal to 1). Examples include U.S. Patents 4,417,000; 4,423,155; 4,520,216; 4,590,176; and 4,521,540. These processes all run in the gas phase, and may be considered multi-step processes in that they all require the feed be shifted via Reaction (1).

Single-step gas-phase processes have been disclosed by Mobil Corp. and Haldor-Topsoe. For example, U.S. Patent 4,011,275 assigned to Mobil Corp. discloses a gas-phase process for co-production of methanol and dimethyl ether with H_2 deficient syngas feeds. Although there are not examples in the patent, the process is claimed to be useful for improving conversion of synthesis gas. U.S. Patent 4,341,069 discloses a gas-phase process for dimethyl ether production to be used in conjunction with an integrated gasification combined cycle power plant. Examples in the patent show that the catalyst requires frequent regeneration, in some cases on a daily basis. Another gas-phase process is described in U.S. Patent 4,481,305, however, this process is restricted to operation within a narrow range of CO/CO_2 ratio in the feed gas. It should be noted that efficient heat removal to maintain reactor temperature is generally not discussed in these patents. Fujimoto et al discussed in Chem. Letters, p.2051 (1984) the chemistry of the gas-phase one-step processes.

Combined methanol/dimethyl ether synthesis in the liquid phase has been reported by several workers. Sherwin and Blum, in their paper: "Liquid Phase Methanol Interim Report, May 1978", prepared for the

Electric Power Research Institute, attempted to modify the liquid phase methanol process for co-production of dimethyl ether by adding acid catalyst components to the system. The observed only traces of dimethyl ether, and concluded that the attempt was unsuccessful. Daroda, et al, J.C.S. Chem. Comm. p.1101 (1980), reported a broad slate of products for reactions of syngas with Fe in 2-methoxyethanol. However, in their
 5 system the solvent appears to act as a reactant, and the catalyst produces many side products. Consequently, neither earlier liquid phase process was economic.

SUMMARY OF THE INVENTION

10

The present invention is a single step process for direct production of dimethyl ether, with varying amounts of co-product methanol, from wide varieties of synthesis gas. Basically, the invention is an improvement to a process for the synthesis of dimethyl ether from a synthesis gas comprising hydrogen,
 15 carbon monoxide and carbon dioxide, wherein the synthesis gas is contacted and reacted in the presence of a solid catalyst. The improvement is the contacting and reacting of the synthesis gas in the presence of a solid catalyst system suspended in a liquid medium in a three phase (liquid phase) reactor system. The solid catalyst system can either be a single catalyst or a mixture of catalysts, provided the catalyst system comprises both a methanol synthesis component and a dehydration (ether forming) component. The reactor
 20 system can either be a single three phase reactor or a series of staged three phase reactors. Even though the process of the present invention can be carried out in a series of the staged three phase reactors, the dimethyl ether synthesis is carried out in a single step, i.e. all three reactions in the synthesis route are being driven simultaneously.

The process of the present invention can be operated in either an ebullated bed mode with a granulated
 25 (shaped pellet) or a slurry mode with a powdered catalyst. The concentration of catalyst suspended in the liquid medium is in the range from about 5 wt% to about 60 wt%. As stated earlier, the catalyst utilized in the process should comprise both a methanol synthesis component and a dehydration component. The methanol synthesis component can for example comprise a typical copper methanol synthesis catalyst. The dehydration component can be selected from the group consisting of alumina, silica-alumina, zeolites (e.g.
 30 ZSM-5), solid acids (e.g. boric acid), solid acid ion exchange resins (e.g. perfluorinated sulfonic acid) and mixtures thereof.

The preferred operating conditions of the process are a pressure range from about 200 psig to about 2000 psig, more preferably from about 400 psig to about 1000 psig; a temperature range from about 200 °C to about 350 °C; and a space velocity in excess of 50 standard liters of synthesis gas per kilogram of
 35 catalyst, more preferably in the range from about 1000 to about 10,000 standard liters of synthesis gas per kilogram of catalyst.

The process is particularly useful for higher CO content synthesis gases, even where the concentration of carbon monoxide in the synthesis gas is in excess of 50 vol%.

The process can also comprise a further step of adding water to the three phase reactor as a co-feed.
 40 The water can be added as a liquid or a vapor. The addition of water is particularly beneficial when the concentration of hydrogen in the synthesis gas is less than 10 vol%.

The process of the present invention is particularly suited for use in an integrated gasification combined cycle power plant for the production of electrical energy, wherein the process of the present invention would produce a storable fuel for peak-shaving.

45

DETAILED DESCRIPTION OF THE INVENTION

50 The present invention is a single step process for the direct synthesis of dimethyl ether from synthesis gas with or without co-product methanol in the liquid phase. Selectivity for dimethyl ether and methanol can be optimized by varying reaction conditions and/or catalyst compositions to suit the process application.

The process uses a single catalyst or a physical mixture of catalysts which can be in the form of shaped pellets or in the form of a fine powder, depending on the mode of operation. Many types of
 55 catalysts are known in the literature for each individual reaction of the process, and these can be mixed in various proportions in the reactor. Alternatively, a single catalyst component may be used to facilitate all three reactions. However, the catalyst utilized in the process should have a methanol synthesis component and a dehydration component. An example of a methanol synthesis catalytic component is copper.

Examples of a dehydration or ether forming component are alumina, silica-alumina, zeolites, solids acids such as boric acid, and solid acid ion exchange resins such as perfluorinated sulfonic acids.

Catalyst loadings can vary from very dilute, i.e. 5 wt% of the slurry, to very concentrated, i.e. 60 wt% or higher of the slurry. The catalyst is suspended in an inert oil, such as a paraffinic hydrocarbon or a hydrocarbon blend. Other types of liquids are known to work for liquid phase processes, for example, oxygenated species such as alcohols, ethers, and polyethers. These oxygenated liquids should be inert, and have a boiling point for single component liquids or boiling range for blended liquids between 150 °C and 450 °C.

In the process of the present invention, synthesis gas is introduced into the reactor and contacts the suspended catalyst. The synthesis gas is typically comprised of H₂, CO, CO₂, and often inert species such as N₂ and CH₄. The composition of the gas can vary widely, as shown in the Examples. Depending on feed concentrations of H₂, CO, and CO₂, it may be advantageous to co-feed H₂O either as a liquid or vapor to the process in order to adjust the gas composition via the shift reaction. This water addition is particularly beneficial when the concentration of hydrogen in the synthesis gas is less than 10 vol%. In addition, it may be advantageous to remove CO₂ from the feed gas in order to affect the dimethyl ether product selectivity. The removal of CO₂ can be accomplished by any conventional means, e.g. pressure swing adsorption or absorption using a CO₂ selective solvent such as amines. The feed gas can be composed entirely of fresh feed in a once-through application, or it may be composed of a mixture of fresh feed and recycled gas.

Process conditions can vary widely, depending on operating conditions and type of reactor. Pressure ranges from ambient to high pressure, since increasing pressure typically enhances synthesis. Preferred pressures range from 200 to 2000 psig, and higher, more preferably 400 to 1000 psig. Temperature can range from 200 °C to 350 °C, and preferably from 225 °C to 300 °C. Space velocities, measured as standard liters of synthesis gas per kilogram of catalyst per hour can range from 50 to 50,000 and higher, depending on the cost of downstream separation of the dimethyl ether and methanol products; the most preferably range is between 1000 and 10,000 standard liters of synthesis gas per kilogram of catalyst per hour.

Process conditions and yields are illustrated in the following series of examples, which describe the use of various catalyst mixtures as well as single components, and co-feed of H₂O. All runs were made in either a 300 cc or a 1 liter stainless steel autoclave with feed and product gas analysis via gas chromatograph.

Although the following examples were carried out in a single three phase reactor, the process of the present invention can be carried out in a series of staged three phase reactors. Process conditions for the different reactors can be varied, however, the reactor conditions are not varied from reactor to reactor to isolate and accomplish a single reaction in the synthesis route. The process of the present invention is accomplished by simultaneously carrying out the three reactions of the dimethyl ether synthesis route.

EXAMPLE I

The first series of experiments were performed with a so-called balanced gas (55% H₂, 19% CO, 5% CO₂, 21% N₂) at 250 °C and 800 psig. A 25 wt% slurry consisting of 20 grams BASF S3-85 methanol catalyst and 20 grams of 200 mesh Catapal® high purity alumina was prepared in degassed Witco 70 oil. Results are shown in Table I; methanol and dimethyl ether were the only detectable products. Comparison of CO conversions for methanol alone and dimethyl ether shows that the single-step dimethyl ether process is more efficient in overall CO conversion than production of methanol alone. In fact, Runs 1 and 2 show CO conversions greater than the thermodynamic maximum conversion for methanol alone.

CO₂ was found to have a major impact on dimethyl ether formation. Run 5, with no inlet CO₂, showed substantially higher dimethyl ether productivity and selectivity than Run 3. This comparison illustrates the potential for CO₂ removal from the feed gas.

Table 1

Run	Feed	Temp (°C)	GHSV (s-1/kg-catal hr)	Productivity (mol/kg-catal hr)		DME/MeOH Selectivity (mol%/mol%)	CO Conversion (mol %) ¹
				DME	MeOH		
1	Bal	250	1500	2.3	1.6	60/40	69 (44)
2	Bal	250	2500	3.2	2.6	55/45	55 (40)
3	Bal	250	2750	2.8	3.0	49.51	52 (39)
4	Bal	250	5000	3.6	4.2	46.54	36 (32)
5	Bal ²	250	2750	4.7	1.5	76/24	65

Note 1: Numbers in parentheses indicate carbon monoxide conversion observed for methanol synthesis in the absence of dimethyl ether synthesis.

Note 2: Balanced gas with no inlet CO₂ (57% H₂, 20% CO, 0% CO₂, 23% N₂)

EXAMPLE II

To illustrate the use of a different catalyst mixture, and a different gas feed, a second series of experiments was made with 20 grams BASF S3-85 methanol catalyst and 40 grams Davison Silica/Alumina in degassed Witco 70 oil. Ten conditions were run with CO-rich and balanced gas at temperatures of 250°C and ~265°C, and pressure of 80 psig. Results are shown in Table 2. Balanced gas has the same composition as the earlier examples, and CO-rich gas is comprised of 35% H₂, 51% CO, 13% CO₂, and 1% N₂. Space velocities and productivities are based on the total oxide catalyst charged to the system.

Table 2

Run	Feed	Temp (°C)	GHSV (s-1/kg catal-hr)	Productivity (mol/kg catal-hr)		DME/MeOH Selectivity (mol%/mol%)
				DME	MeOH	
6	Bal	250	1870	2.46	0.96	72/28
7	Bal	250	3130	2.57	1.66	61/39
8	Bal	250	1120	1.92	0.57	77/23
9	Bal	263	1870	2.57	0.92	74/26
10	Bal	264	3730	3.09	1.45	68/32
11	Bal	265	1350	2.12	0.54	80/20
12	CO-rich	250	1870	1.41	0.42	77/23
13	CO-rich	250	1870	1.36	0.46	75/25
14	CO-rich	250	3130	1.18	0.59	66/34
15	CO-rich	250	1120	1.16	0.26	82/18

EXAMPLE III

A third series of experiments illustrates operation with H₂O co-feed, and simultaneous shift, methanol and dimethyl ether reactions. A 15 wt% slurry comprised of 25 grams BASF K3-110 commercial low-temperature shift catalyst, 25 grams BASF S3-85, and 25 grams Catapal® alumina was slurried in 425 grams degassed Witco 70 oil. The pressure was 800 psig. The feed gas was 0.8% H₂, 57.7% CO, 15.5% CO₂, and balance N₂. Steam was co-fed with the gas to shift the CO and produce H₂. Results are summarized in Table 3.

Table 3

Run	Feed Ratio H ₂ O/CO	Temp (°C)	GHSV (s-1/kg-catal hr)	Productivity (mol/kg-catal hr)		DME/MeOH Selectivity (mol%/mol%)
				DME	MeOH	
16	0.50	249	2000	0.40	2.19	16/84
17	0.33	247	1860	2.64	2.11	56/44

EXAMPLE IV

A final series of experiments illustrates the use of a single catalyst species in the process. A copper on alumina catalyst was prepared by dissolving 64.03 grams $\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ in 100 ml deionized water. The solution was used to impregnate 78.14 grams Al_2O_3 in several portions, with N_2 purging between impregnations. The catalyst was dried overnight at 110°C , and reduced with 2% H_2 in N_2 . Following reduction, 25 grams catalyst (equivalent to 40.6 gram as oxide) were slurried in 100 grams of degassed Witco 70 oil. The system was run at 800 psig, and results are shown in Table 4.

Table 4

Run	Feed	Temp (°C)	GHSV (s-1/kg catal-hr)	Productivity (mol/kg catal-hr)		DME/MeOH Selectivity (mol%/mol%)
				DME	MeOH	
18	Bal	249	3000	0.58	0.45	56/44
19	Bal	265	3000	0.82	0.41	67/33
20	Bal	296	3000	1.07	0.28	79/21

The present invention with its efficient production of dimethyl ether with a methanol co-product can address a limitation of the liquid phase methanol process, which usually arises in its application for use in integrated gasification combined cycle electric power plants. In this application, the liquid phase methanol process generates methanol, a storable fuel, for peak-shaving. However, the methanol production rate is often limited by thermodynamic constraints. Hence, there is a limit to the amount of storage fuel which can be produced by the liquid phase methanol process. Co-production of dimethyl ether and methanol does not suffer from this thermodynamic constraint. Consequently, an improved process could produce a greater quantity of storable fuel.

The present invention solves the previously described problems through two features inherent in the process. First, the liquid medium acts as a heat sink, resulting in isothermal operation for the reactor. This factor is critical since the forward shift, methanol synthesis, and dimethyl ether synthesis reactions are all exothermic. With conventional gas-phase processes, the heat released during reaction increases temperature, which impedes reaction due to thermodynamic limitations, and causes catalyst deactivation. The high thermal capacity of the liquid phase permits high conversions while maintaining stable temperatures. This excellent temperature control may be responsible for increased catalyst life of this process relative to gas phase operations which require frequent catalyst regeneration.

The second feature of this process is that it uniquely exploits the synergism of the chemistry of all three reactions by combining them in a single step. By combining the three reactions in a simultaneous process, each of the individual reactions is driven thermodynamically by removing its inhibiting products as reactants for the subsequent reaction. For example, the first series of experiments showed CO conversions for the DME process which exceed the thermodynamic maximum for methanol synthesis alone. Such synergism cannot be achieved in multi-step process, where each reaction proceeds at most to its individual thermodynamic limitation in separate reactors.

Also, since all reactions in the process of the present invention proceed co-currently, the process

permits several options for varying the product distribution by manipulating the extent of each reaction. For example, the DME/MeOH selectivity can be controlled by varying the amount or activity of catalyst constituents in a process using a mixture of catalysts, or by altering the intrinsic selectivity of the catalyst in a process using a single catalyst. The product distribution can also be varied by changing reaction conditions such as space velocity, temperature, pressure or feed compositions.

As a summary, the distinguishing features of the present invention are the liquid phase operation and the concomitant occurrence of the shift, MeOH synthesis, and DME synthesis reactions. Both features are required for efficient operation and process flexibility.

Although several processes make use of combinations of reactions (1) through (3), the reactions are conducted in the gas phase. Since the shift and methanol synthesis reactions are thermodynamically limited by high temperatures and all three reactions are exothermic, removal of heat from the reactor is a critical and probably the limiting factor in their design. The significance of the thermal control provided by the liquid phase is best illustrated by comparing gas and liquid phase processes. For example, the adiabatic temperature rise for a gas-phase process providing the same conversions as the conditions of Run 1 is 350 °C, versus a liquid phase process with an actual temperature rise less than 10 °C due to the presence of the liquid phase. No current commercial catalyst could survive the gas phase adiabatic temperature of 600 °C, so such a process could not be practically operated without heat removal equipment or product gas recycling. Both options are generally very expensive. For example, using product gas recycling to control the temperature rise would require a recycle ratio in the range of 10 to 20. Such high recycle ratios require high capital investments for compressors and reactors, as well as high operating costs. In comparison, a liquid phase unit would require little or no feed recycle, and a much smaller reactor. Hence liquid phase synthesis can provide economic operation at high conversions.

It should be noted that the prior art has erroneously concluded that liquid phase operation, such as the process of this invention, does not work; Sherwin and Blum failed to produce DME in systems very similar to this process. Hence the success of this process is both novel and surprising. The only other liquid phase synthesis discussed in the prior art is non-selective and consumes an expensive solvent as a reagent, see Daroda et al.

The second distinguishing feature of the invention, the co-current shift, methanol synthesis, and DME synthesis reactions enable the process to use feeds with wide ranges in composition. Previously disclosed processes can only operate within restricted ranges of H₂/CO or CO/CO₂ ratios. This invention demonstrates operation with feeds richer in CO than any previous processes. For example, Runs 16 and 17 show high productivity with feed CO concentrations of 58% and a H₂/CO ratio below 0.02. Such conditions are well beyond those claimed or taught for the prior art processes.

The present invention has been described with reference to several embodiments thereof. These embodiments should not be considered limitations on the scope of the present invention, the scope of which should be ascertained from the following claims.

Claims

1. In a process for the direct synthesis of dimethyl ether from a synthesis gas comprising hydrogen, carbon monoxide and carbon dioxide, wherein the synthesis gas is contacted with and reacted in the presence of a solid catalyst, the improvement comprising contacting and reacting the synthesis gas in the presence of a solid catalyst system, wherein the solid catalyst system is a single catalyst or a mixture of catalysts, suspended in a liquid medium in a three phase (liquid phase) reactor system, wherein the three phase reactor system comprises at least one three phase reactor.

2. The process of Claim 1 wherein the suspended catalyst is in the form of a shaped pellet and the three phase reactor is operated in an ebullated mode.

3. The process of Claim 1 wherein the suspended catalyst is in powdered form and the three phase reactor is operated in a slurry mode.

4. The process of Claim 1 which further comprises operating the process at a pressure in the range from about 200 psig to about 2000 psig.

5. The process of Claim 1 which further comprises operating the process at a pressure in the range from about 400 psig to about 1000 psig.

6. The process of Claim 1 which further comprises operating the process at a temperature in the range from about 200 °C to about 350 °C.

7. The process of Claim 1 which further comprises operating the process at a space velocity in excess of 50 standard liters of synthesis gas per kilogram of catalyst.

8. The process of Claim 1 which further comprises operating the process at a space velocity in the range from about 1,000 to about 10,000 standard liters of synthesis gas per kilogram of catalyst.

9. The process of Claim 1 wherein the concentration of carbon monoxide in the synthesis gas is in excess of 50 vol%.

5 10. The process of Claim 1 which further comprises adding water to the three phase reactor as a co-feed.

11. The process of Claim 10 wherein water is added as a liquid.

12. The process of Claim 10 wherein the concentration of hydrogen in the synthesis gas is less than 10 vol%.

10 13. The process of Claim 1 wherein the concentration of catalyst suspended in the liquid medium is in the range from about 5 wt% to about 60 wt%.

14. The process of Claim 1 wherein the catalyst system comprises a methanol synthesis component and a dehydration (ether forming) component.

15. The process of Claim 1 wherein the catalyst system is a single catalyst containing both a methanol synthesis component and a dehydration (ether forming) component.

16. The process of Claim 14 wherein the methanol component comprises copper.

17. The process of Claim 14 wherein the dehydration (ether forming) component is selected from the group consisting of alumina, silica-alumina, zeolites, solid acids, solid acid ion exchange resins and mixtures thereof.

20 18. The process of Claim 1 which further comprises removing carbon dioxide from the synthesis gas prior to contacting and reacting the synthesis gas with the solid catalyst.

19. In a process for the direct synthesis of dimethyl ether and methanol co-products from a synthesis gas comprising hydrogen, carbon monoxide and carbon dioxide, wherein the synthesis gas is contacted with and reacted in the presence of a solid catalyst, the improvement comprising contacting and reacting the synthesis gas in the presence of a solid catalyst system, wherein the solid catalyst system is a single catalyst or a mixture of catalysts, suspended in a liquid medium in a three phase (liquid phase) reactor system, wherein the three phase reactor system comprises at least one three phase reactor.

20. In a process for the generation of electricity by an integrated gasifier combined cycle power plant, wherein a synthesis gas is contacted with and reacted in the presence of a solid catalyst to produce a storable fuel for peak-shaving, the improvement for increasing the amount of storable fuel comprises producing a dimethyl ether co-product in addition to methanol by contacting and reacting the synthesis gas in the presence of a solid catalyst system, wherein the solid catalyst system is a single catalyst or a mixture of catalysts, suspended in a liquid medium in a three phase (liquid phase) reactor system, wherein the three phase reactor system comprises at least one three phase reactor.

35

40

45

50

55



DOCUMENTS CONSIDERED TO BE RELEVANT			EP 89100483.0
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	GB - A - 278 353 (DELCO-LIGHT COMPANY) * Page 1, lines 35-65; page 2, lines 21-32 * --	1,4,6, 14-19	C 07 C 43/04 C 07 C 41/01
D,A	US - A - 4 423 155 (WELDON K. BELL et al.) * Abstract * --	1,16-19	
D,A	US - A - 4 417 000 (LYNN H. SLAUGH et al.) * Abstract * --	1	
A	DE - A1 - 3 220 547 (SNAMPROGETTI) * Abstract * --	1,16-19	
A	DE - A1 - 3 118 620 (MOBIL OIL) * Claims 1,7,13 * --	1,6,10, 11,14- 17,19	C 07 C 43/00 C 07 C 41/00
D,A	US - A - 4 520 216 (ALLAN SKOV et al.) * Abstract * --	1,4,6, 14-17, 19	C 07 C 27/00 C 07 C 1/00
D,A	US - A - 4 481 305 (ERNEST JORN et al.) * Claim 1 * --	1,19	
D,A	US - A - 4 341 069 (WELDON K. BELL) * Abstract * --	1,19,20	
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 20-03-1989	Examiner REIF
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1947-1948

1949-1950

1951-1952

1953-1954

1955-1956

1957-1958

1959-1960

1961-1962

1963-1964

1965-1966

1967-1968

1969-1970

1971-1972

1973-1974

1975-1976

1977-1978

1979-1980

1981-1982

1983-1984

1985-1986

1987-1988

1989-1990

1991-1992

1993-1994

1995-1996

1997-1998

1999-2000

2001-2002

2003-2004

2005-2006

2007-2008

2009-2010

2011-2012

2013-2014

2015-2016

2017-2018

2019-2020

2021-2022

2023-2024

2025-2026

2027-2028

2029-2030

2031-2032

2033-2034

2035-2036

2037-2038

2039-2040

2041-2042

2043-2044

2045-2046

2047-2048

2049-2050

2051-2052

2053-2054

2055-2056

2057-2058

2059-2060

2061-2062

2063-2064

2065-2066

2067-2068

2069-2070

2071-2072

2073-2074

2075-2076

2077-2078

2079-2080

2081-2082

2083-2084

2085-2086

2087-2088

2089-2090

2091-2092

2093-2094

2095-2096

2097-2098

2099-2100

2101-2102

2103-2104

2105-2106

2107-2108

2109-2110

2111-2112

2113-2114

2115-2116

2117-2118

2119-2120

2121-2122

2123-2124

2125-2126

2127-2128

2129-2130

2131-2132

2133-2134

2135-2136

2137-2138

2139-2140

2141-2142

2143-2144

2145-2146

2147-2148

2149-2150

2151-2152

2153-2154

2155-2156

2157-2158

2159-2160

2161-2162

2163-2164

2165-2166

2167-2168

2169-2170

2171-2172

2173-2174

2175-2176

2177-2178

2179-2180

2181-2182

2183-2184